

## DRIVEWAY WITH CULVERT

NOTE: IT IS RECOMMENDED THAT A CULVERT TYPE DRIVEWAY BE USED ONLY WHEN EXTREME CONDITIONS PREVENT THE DIP-TYPE DRIVEWAY FROM BEING FEASIBLE. SEE FIGURE 1 & 2. CONSULT WITH WILSON COUNTY COMMISSIONER FOR APPLICATION TO LOCAL CONDITIONS


FIGURE 3 Dimensions shown shall vary with R.O.W. width.

Rule 630


Headwalls for Culverts

6' from Edge of Roadway shoulder  
Changes with street Classification

\*\* Dia. of Pipe Plus 1'-0"  
(Min. of 5'-0")

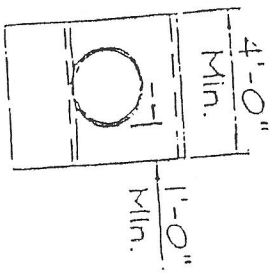

End View  
Not To Scale

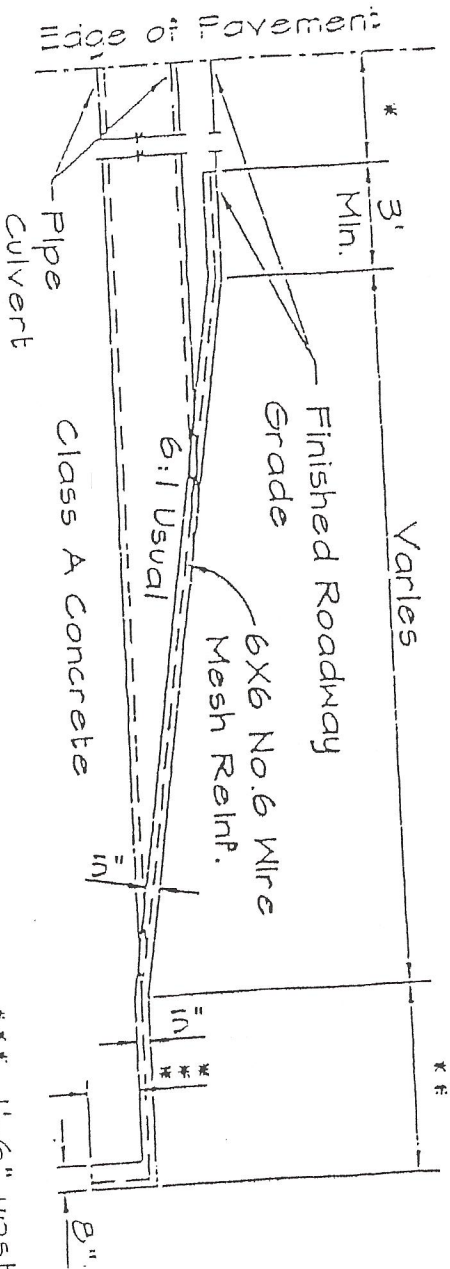

Half Section  
Not To Scale

Cast In Place or Pre-cast

\*\*\* 1'-6" upstream  
2'-0" downstream

Rule 630.1

In cases where a culvert with its headwalls would extend outside the normal right-of-way, the subdivider shall dedicate such additional drainage easement or right-of-way as is required to provided normal access and egress.